




Plastic Products for the Agricultural Sector

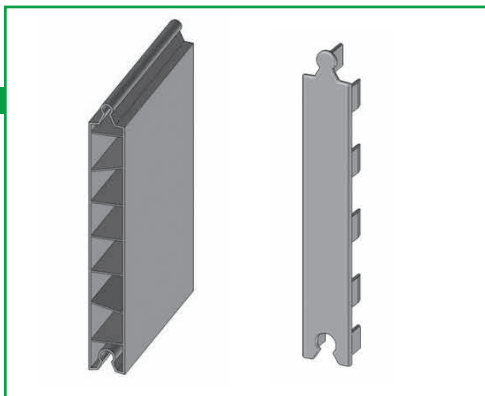

AS-PVC Profiles

AS-PVC-Windows



AS-Reveal Window

# AS - PVC-Profiles

for the modern livestock equipment



SUDING-PVC-Profiles are made of impact- and acid-resistant material. Its great quality guarantees a stable value over many years.

## PVC-Profiles with groove and tongue/end-caps

Article	width	height
ASK 100 x 50	50 mm	100 mm
ASK 180 x 30*	30 mm	178 mm
ASK 200 x 35*	35 mm	200 mm
ASK 250 x 35*	35 mm	250 mm
ASK 200 x 40	40 mm	200 mm
ASK 500 x 35*	35 mm	500 mm
ASK 500 x 50	50 mm	500 mm

*available in white or grey*  
**fixed length: 600 cm**  
**other lengths on demand**

\* for these profiles black end caps are available

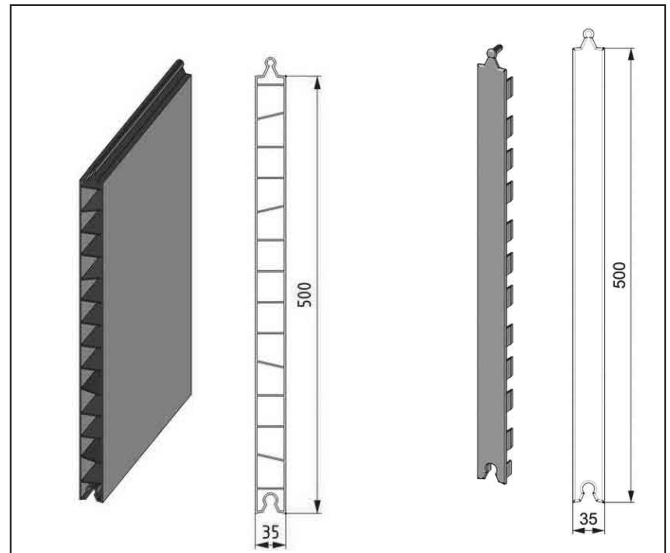
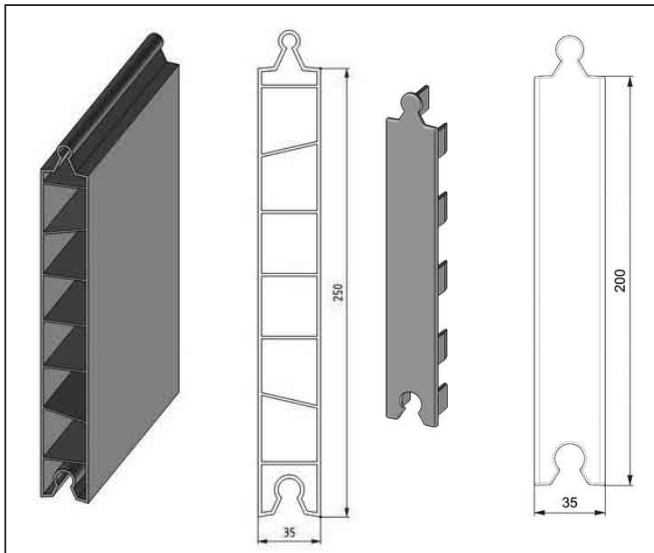


## PVC-Profiles with smooth top & bottom/end-caps

Article	width	height
ASK 500 x 35 smooth*	35 mm	500 mm
ASK 600 x 35 smooth*	35 mm	600 mm
ASK 750 x 35 smooth*	35 mm	750 mm

*available in white or grey*  
**fixed length: 600 cm**  
**other lengths on demand**

\* for these profiles black end caps are available

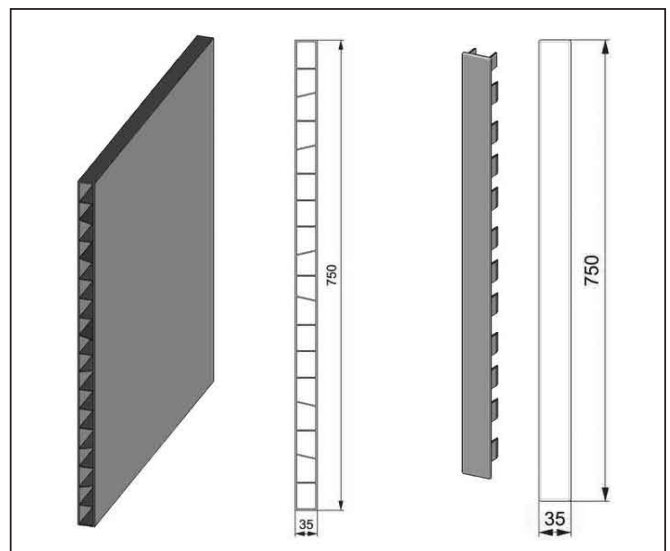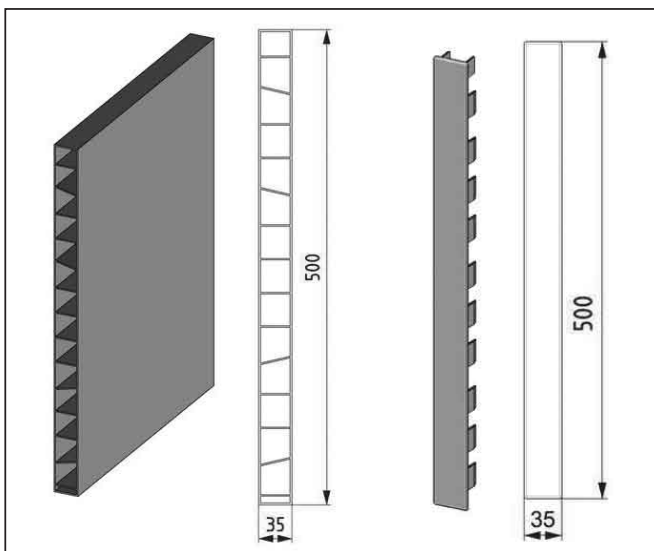

# AS - PVC-Profiles and accessories


for the modern livestock equipment

## End-Profile

End-Profile top		
Article	Width	Height
ASK 125 x 30 smooth	30 mm	125 mm
ASK 250 x 35 smooth	35 mm	250 mm
ASK 35 x 30 <sup>1</sup>	30 mm	35 mm
End-Profile bottom		
Article	Width	Height
ASK 10 x 30 <sup>1</sup>	30 mm	10 mm

**available in white or grey**  
**fixed length: 600 cm**  
**other lengths on demand**

\* for these profiles black end-caps are available  
<sup>1</sup> suitable for 30 to 40 mm profile panels


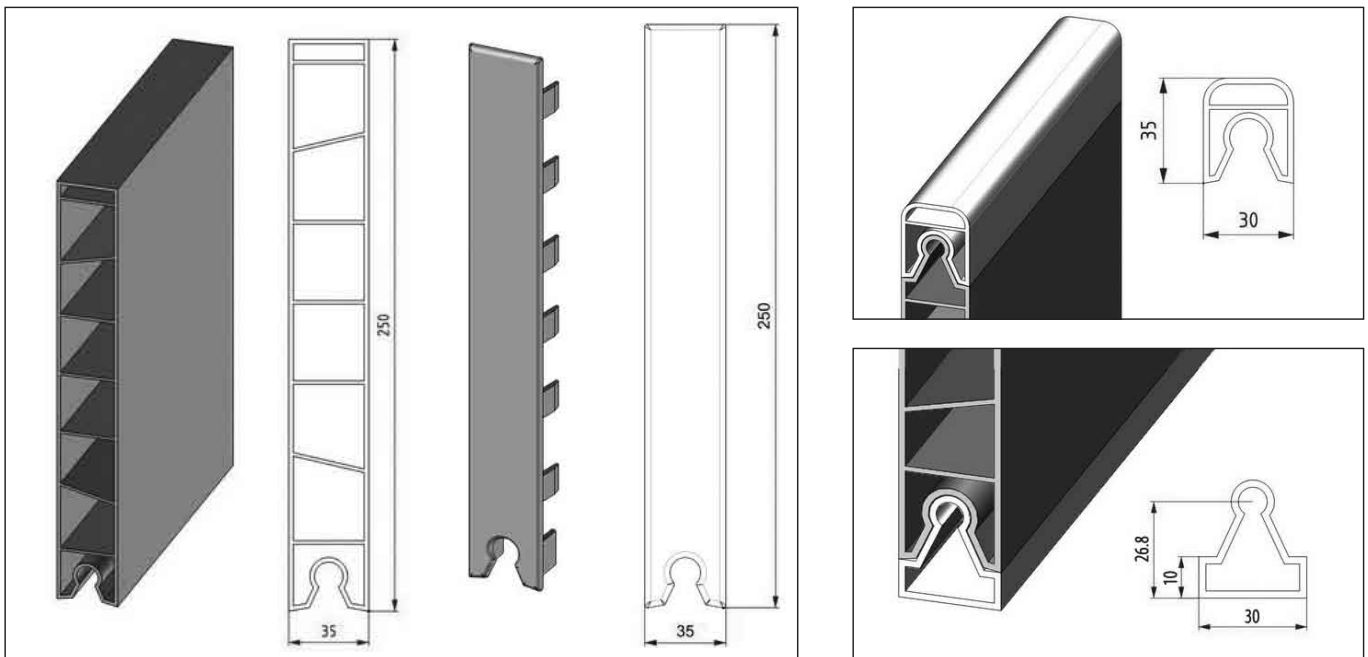


## U- and L-Profile

Article	Width (inside)	Height (inside)
ASK U-Profile 35	35 mm	36 mm
ASK U-Profile 40	40 mm	36 mm
ASK L-Profile	37 mm	57 mm


wall thickness: U-Profile 4 mm – L-Profile 3mm

**available in grey**  
**fixed length: 600 cm**  
**other lengths on demand**

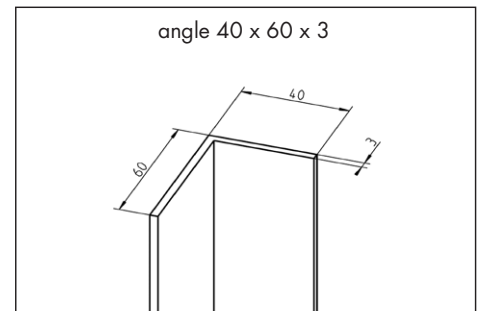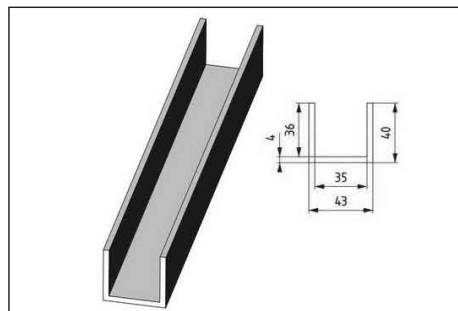

## Oval-Profile/ Profile-Pipe

Article	Width (inside)	Height (inside)
ASK Oval-Profile	35 mm	70 mm
ASK End-Cap Oval Profile	35 mm	70 mm
ASK Connector Oval Profile	35 mm	2 x 50 mm
ASK Profile-Pipe	52 mm	72 mm

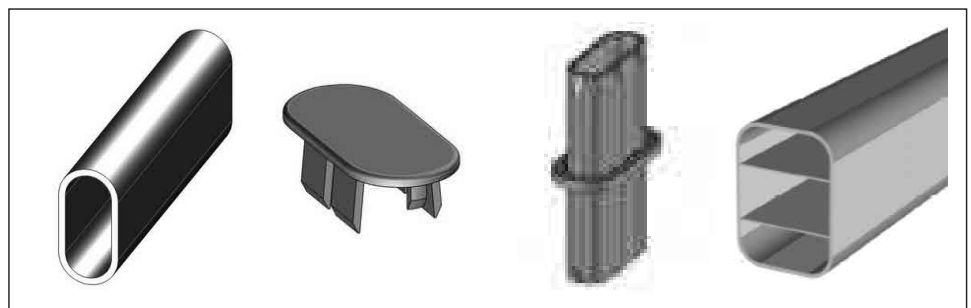

# AS-PVC-Windows

*for air and light in the sty*

*SUDING-PVC-Windows are a cost-effective solution for the modern sty construction. They are stable in value for many years. Available are window frames in white, brown or grey.*

## Single-pane, tilt-window

single-glazing or insulation-glazing - Ug-value 3.1 for insulating pane (16 mm)



Window sizes single pane	
Series sizes (external dimensions) Width x Height in cm	Translucence in m <sup>2</sup>
100 x 80	0,60
100 x100	0,77
125 x 87,5	0,85
100 x120	0,95
120 x 80	0,73
120 x100	0,95
125 x100	0,99

## Double-pane, tilt-window

single-glazing or insulation-glazing - Ug-value 3.1 for insulating pane (16 mm)



Window sizes double pane	
Series sizes (external dimensions) Width x Height in cm	Translucence in m <sup>2</sup>
100 x 80	0,54
100 x100	0,71
100 x120	0,89
120 x 80	0,67
120 x100	0,89
125 x100	0,93

## Windows with fixed pane

insulating-glazing with one or two panes - Ug-value 1.1 (24 mm)



Window single pane	Window double
Series sizes (external dimensions) Width x Height in cm	Series sizes (external dimensions) Width x Height in cm
100 x 80	100 x 80
100 x100	100 x100
125 x 87,5	100 x120
100 x120	120 x 80
120 x 80	120 x100
120 x100	125 x100
125 x100	

On ordering, please always state the width first and then the height. Other sizes on demand.

# AS-PVC-Windows

for air and light in the sty

## Spare panes

Spare pane single glazing windows Clear glass/insulating glass - 16 mm (Ug 3.1)	
Pane size Width x Height in cm	Window size Width x Height in cm
89,5 x 71,5	100 x 80
89,5 x 91,5	100 x 100
114,5 x 79,0	125 x 87,5
89,5 x 111,5	100 x 120
109,5 x 71,5	120 x 80
109,5 x 91,5	120 x 100
114,5 x 91,5	125 x 100


Spare pane double glazing windows Clear glass/insulating glass - 16 mm (Ug 3.1)	
Pane size Width x Height in cm	Window size Width x Height in cm
89,5 x 33,7 *	100 x 80
89,5 x 34,5 **	
89,5 x 43,7 *	100 x 100
89,5 x 44,5 **	
89,5 x 53,7 *	100 x 120
89,5 x 54,5 **	
109,5x 33,7 *	120 x 80
109,5 x 34,5 **	
109,5x 43,7 *	120 x 100
109,5 x 44,5 **	
114,5x 43,7 *	125 x 100
114,5 x 44,5 **	

Spare pane single glazing windows Insulating glass - 24 mm (Ug 1.1)	
Pane size Width x Height in cm	Window size Width x Height in cm
93,5 x 73,5	100 x 80
93,5 x 93,5	100 x 100
118,5 x 81,0	125 x 87,5
93,5 x 113,5	100 x 120
113,5 x 73,5	120 x 80
113,5 x 93,5	120 x 100
118,5 x 93,5	125 x 100

Spare pane double glazing windows Insulating glass - 24 mm (Ug 1.1)	
Pane size Width x Height in cm	Window size Width x Height in cm
93,5 x 35,3	100 x 80
93,5 x 45,3	100 x 100
93,5 x 55,3	100 x 120
113,5 x 35,3	120 x 80
113,5 x 45,3	120 x 100
118,5 x 55,3	125 x 100

\* pane size top  
\*\* pane size bottom

On ordering please always give the width first and then the height

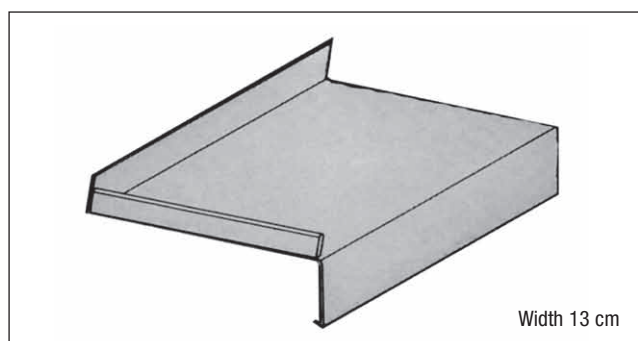

## AS-Window sills

made of refaced aluminium

These window sills stand out due to their extremely low cost and trouble-free assembling. Their treated surface made of aluminium guarantees best protection against all seasonal changes.

## Quick and easy assembly



Place the AS-PVC-Window inside the window opening and use wooden wedges and a spirit level to adjust it.



Fix the frame in the corners using insulating foam, remove the wooden wedges and fill all around with foam flush and use a permanently elastic seal.

# AS-Reveal-Window

*for air and light in the sty*

*available with fixed pane or as tilt-window*



The AS-Reveal-Window enables a quick and therefore economical assembly of plastic windows in the modern stable building. The window comes complete with frame connector and is optimal for use in walls 17,5/24/30 and 36,5 cm.

## Further advantages are:

- Made of impact- and acid-resistant material
- Stable in value for many years
- Ug-value 3.1. for double-glazing (16mm)/tilt-window
- Ug-value 1.1. for double-glazing (24mm)/fixed pane
- All-round wall panel
- Durable all-round rubber gasket
- Windows are pre-finished on delivery

The AS-Reveal-Window is available in white with insulation-glazing as tilt-window, as well as with fixed pane in the following measurements:

AS Reveal-Window	
Reveal size (external dimension) Width x Height in cm	Reveal size (external dimension) Width x Height in cm
100 x 80	120 x 80
100 x 100	120 x 100
100 x 120	125 x 100
100 x 125	125 x 125


# AS-Reveal-Window

*for air and light in the sty*

*Special measurements on demand*

When ordering or asking for a quote, please always state the width first and then the height.

## Further characteristics of the Reveal-Window:

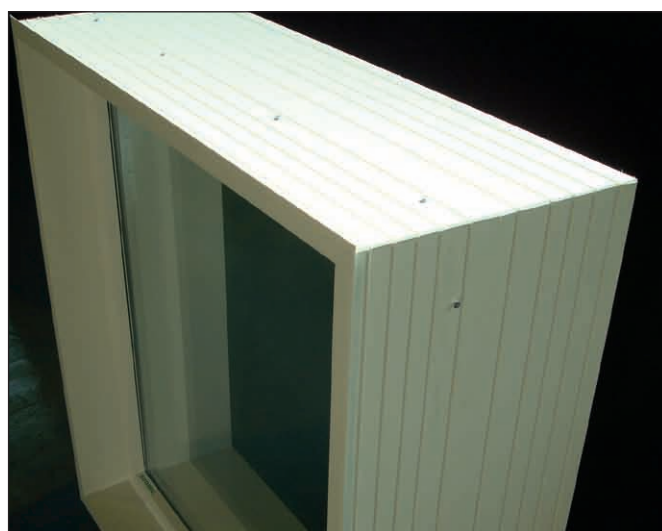

The window will be delivered with a pre-fitted wooden frame, to guarantee the secure fitting. The reveal frame is therefore optimally supported and cannot buckle under pressure. The rip profile guarantees an ideal interlocking in the brickwork.

## Assembly

The AS-Reveal-Window can either be immured directly (using window lintels) or it can be placed in the gap of the wall subsequently and then sealed with insulating foam.

## Technical data:

Wall-width			
17,5 cm	24,0 cm	30,0 cm	36,5 cm

Measurements		
Reveal size (external dimension) w x h	Window size (external dimension) w x h	Translucence
100 cm x 80 cm	96 cm x 76 cm	0,52 qm
120 cm x 80 cm	116 cm x 76 cm	0,65 qm
100 cm x 100 cm	96 cm x 96 cm	0,69 qm
100 cm x 120 cm	96 cm x 116 cm	0,85 qm
100 cm x 125 cm	96 cm x 121 cm	0,90 qm
120 cm x 100 cm	116 cm x 96 cm	0,85 qm
125 cm x 100 cm	121 cm x 96 cm	0,90 qm
125 cm x 125 cm	121 cm x 121 cm	1,10 qm



# SUDING

Beton- und Kunststoffwerk GmbH  
Vestruper Straße 6 • D-49456 Bakum-Lüsche  
Tel. +49 (0) 54 38 / 94 10-0 • Fax 94 10-20  
www.suding.de • info@suding.de



# SUDING

Beton- und Kunststoffwerk GmbH  
Dessauer Str. 1 • 39619 Arendsee-Kleinau  
Tel. +49 (0) 3 93 99 / 9 66 66 • Fax 9 67 99  
www.suding.de • info@suding.de



# SUDING

Spaltenboden GmbH  
Höhenbergweg 9 • 29348 Eschede  
Tel. +49 (0) 51 42 / 9 89 00 • Fax 98 90 20  
www.suding.de • info@suding.de



# SUDING

Spaltenboden GmbH  
Paul-Ehrlich-Straße 15 • 63322 Rödermark  
Tel. +49 (0) 60 74 / 99 021 • Fax 99 024  
www.suding.de • info@suding.de

Contact: